



APPLICATION

INTERIOR
WOOD
SOLUTIONS




APPLICATION

Foil Bonding

Dynea AS
PO Box 160,
2001 Lillestrøm, Norway

Phone: +47 63897100
Fax: +47 63897610
Email: dynea@dynea.com
Web: www.dynea.com
Dynea Leaflet-v1.3

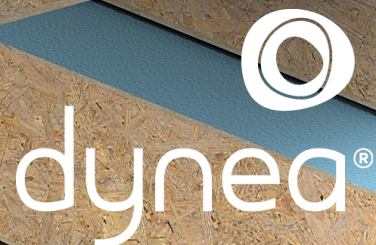

Dedicated to
wood adhesives

Foil Bonding

Dynea's range of adhesives for Foil Bonding is specially suited for bonding of different foil types to wood-based panel substrates. Surface-refined interior products with a large variety of profiles can be created in high performance processes.



Key features

- Low emission or formaldehyde-free solutions
- 1-component, or separate application systems
- Solutions suitable for hot pressing
- Solutions suitable for paper-based foils, plastic-reinforced paper foils, PVC- or PP- foils

prefere[®]
by dynea

Urea adhesive systems

- + Prefere 4115 with hardeners
- + Prefere 5361
- + Prefere 5311
- + Prefere 5317
- + Prefere 5323

- + Prefere 4108 with hardeners
- + Prefere 5311
- + Prefere 5323

- + Prefere 4107 with hardener
- + Prefere 5361

PVAc adhesives

- + Prefere 6561
- + Prefere 6560

Available solutions

- Urea adhesive systems
- PVAc adhesive solutions

For further details, please refer to our Technical Data Sheets, or contact us via dynea@dynea.com