



APPLICATION

INTERIOR
WOOD
SOLUTIONS



APPLICATION

Form Bending

Dynea AS
PO Box 160,
2001 Lillestrøm, Norway


Phone: +47 63897100
Fax: +47 63897610
Email: dynea@dynea.com
Web: www.dynea.com
Dynea Leaflet-v2.3



Dedicated to
wood adhesives

Form Bending

Dynea's range of adhesives for Form Bending applications is suitable for various curved plywood constructions. Very complex, form bent furniture parts of high strength can be manufactured with respect to production conditions and end-use of the product.

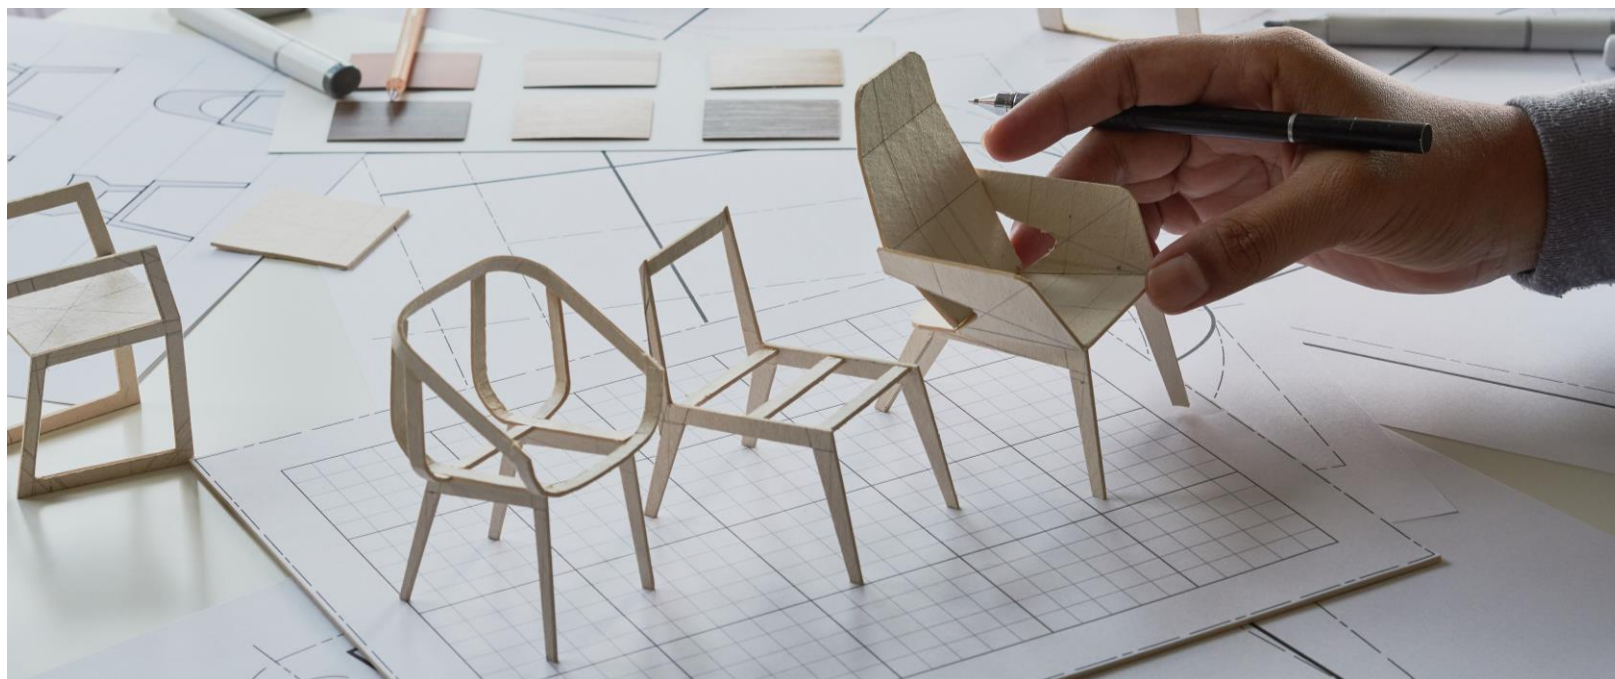

Key features

- Low emission solutions
- Solutions suitable for hot pressing or RF-pressing

Application equipment

- Equipment for mix-in application
- Kuni LMX mixers and roller spreaders

Available solutions

- ULEF Low emission amino adhesives
- Urea adhesive systems

prefere[®]
by dynea

Urea adhesive systems

- + Prefere 4116 with hardeners
- + Prefere 5267
- + Prefere 5269
- + Prefere 5275

(For low emission according to IKEA form bending requirements)

- + Prefere 4115 with hardeners
- + Prefere 5267
- + Prefere 5268

- + Prefere 4114 with hardeners
- + Prefere 5267
- + Prefere 5268
- + Prefere 5269
- + Prefere 5275
- + Prefere 5278

- + Prefere 4108 with hardeners
- + Prefere 5224
- + Prefere 5267
- + Prefere 5268

- + Prefere 4173 with various hardeners and fillers

- + Prefere 4172 with various hardeners and fillers

Low emission amino systems

- + Prefere 7210 with various hardeners

For further details, please refer to our Technical Data Sheets, or contact us via dynea@dynea.com